OUTDOOR

Regor 11 Sport

The ultimate LED solution for traditional SON and metal halide floodlight fixtures, providing optimum light levels. This highly efficient LED floodlight is the perfect solution for a variety of sporting applications. Whether illuminating a rugby pitch, football pitch, tennis facility, a track and field stadium, or other sporting arena, our floodlight system is capable of delivering high-quality lighting that enhances the playing experience for athletes and spectators alike.

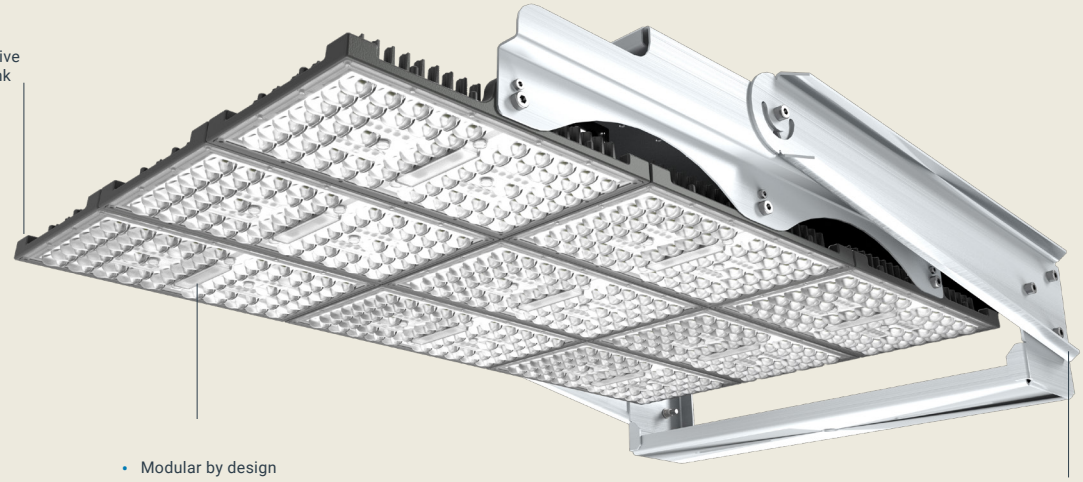

1200W

Features

- IP65
- Range of outputs available
- Efficient to 140-160 LI/cW
- High mast asymmetric lens
- Front and rear visor options available For light spill control
- Universal under-hang and top mount bracket
- Lightweight Inventronics driver

Applications

- Car Park
- External
- High Mast
- Leisure

Options and Accessories

27K	2700K Colour Temperature
3K	3000K Colour Temperature
5K	5000K Colour Temperature
65K	6500K Colour Temperature
415V	Split Phase Driver
C90	CRI90 LEDs
RD	Remote driver option - cable assembly to custom length to suit any application
DD	SwitchDIM/DALI
WL	Wireless Control

Photometric



Dimensions

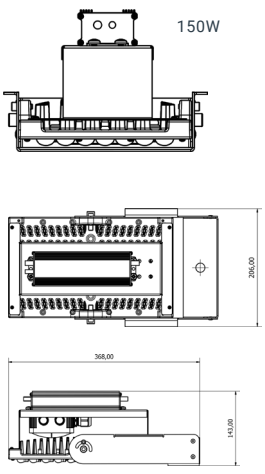

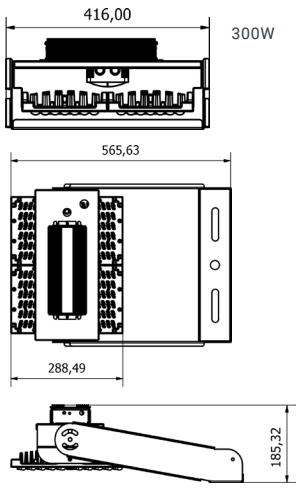

IN KEEPING WITH POWERLITE FITZGERALD'S POLICY OF CONTINUED DEVELOPMENT, WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE. THE INFORMATION CONTAINED IN THIS DATA SHEET DOES NOT FORM PART OF ANY CONTRACT.

Key Features



150W



350W

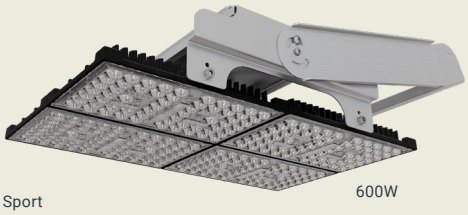

600W

- Regor 11 Sport



- Regor 11 Sport in situe

Technical Details

Part No.	Description	Weight (kg)	Windage (m2) when flat mounted	Power (W)	Luminaire Lumens	LI/cW
R11L100-SPORT-4K	Sports Floodlight	3.5	0.0625	101	15,529	153.8
R11L150-SPORT-4K	Sports Floodlight	3.5	0.0625	155	22,618	145.9
R11L300-SPORT-4K	Sports Floodlight	7.6	0.125	308	43,736	142.0
R11L450-SPORT-4K	Sports Floodlight	14.8	0.125	462	68,400	148.1
R11L600-SPORT-4K	Sports Floodlight	14.8	0.125	617	87,610	142.0
R11L950-SPORT-4K	Sports Floodlight	19.5	0.15	995	140,300	141.0
R11L1200-SPORT-REM-4K	Sports Floodlight | Remote Driver as standard	27.0	0.15	1196	174,600	145.9

Dimensions Cont

600W

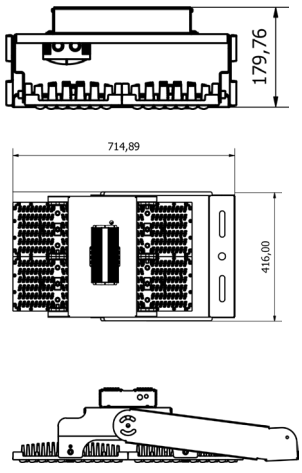

950W

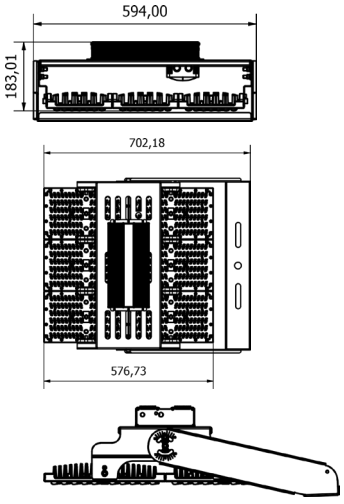

1200W

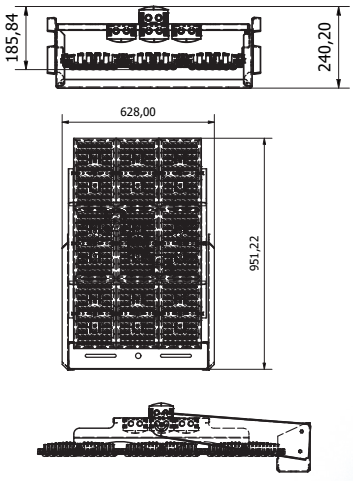

IN KEEPING WITH POWERLITE FITZGERALD'S POLICY OF CONTINUED DEVELOPMENT, WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE. THE INFORMATION CONTAINED IN THIS DATA SHEET DOES NOT FORM PART OF ANY CONTRACT.